


HEAT 2g L 66.50.01

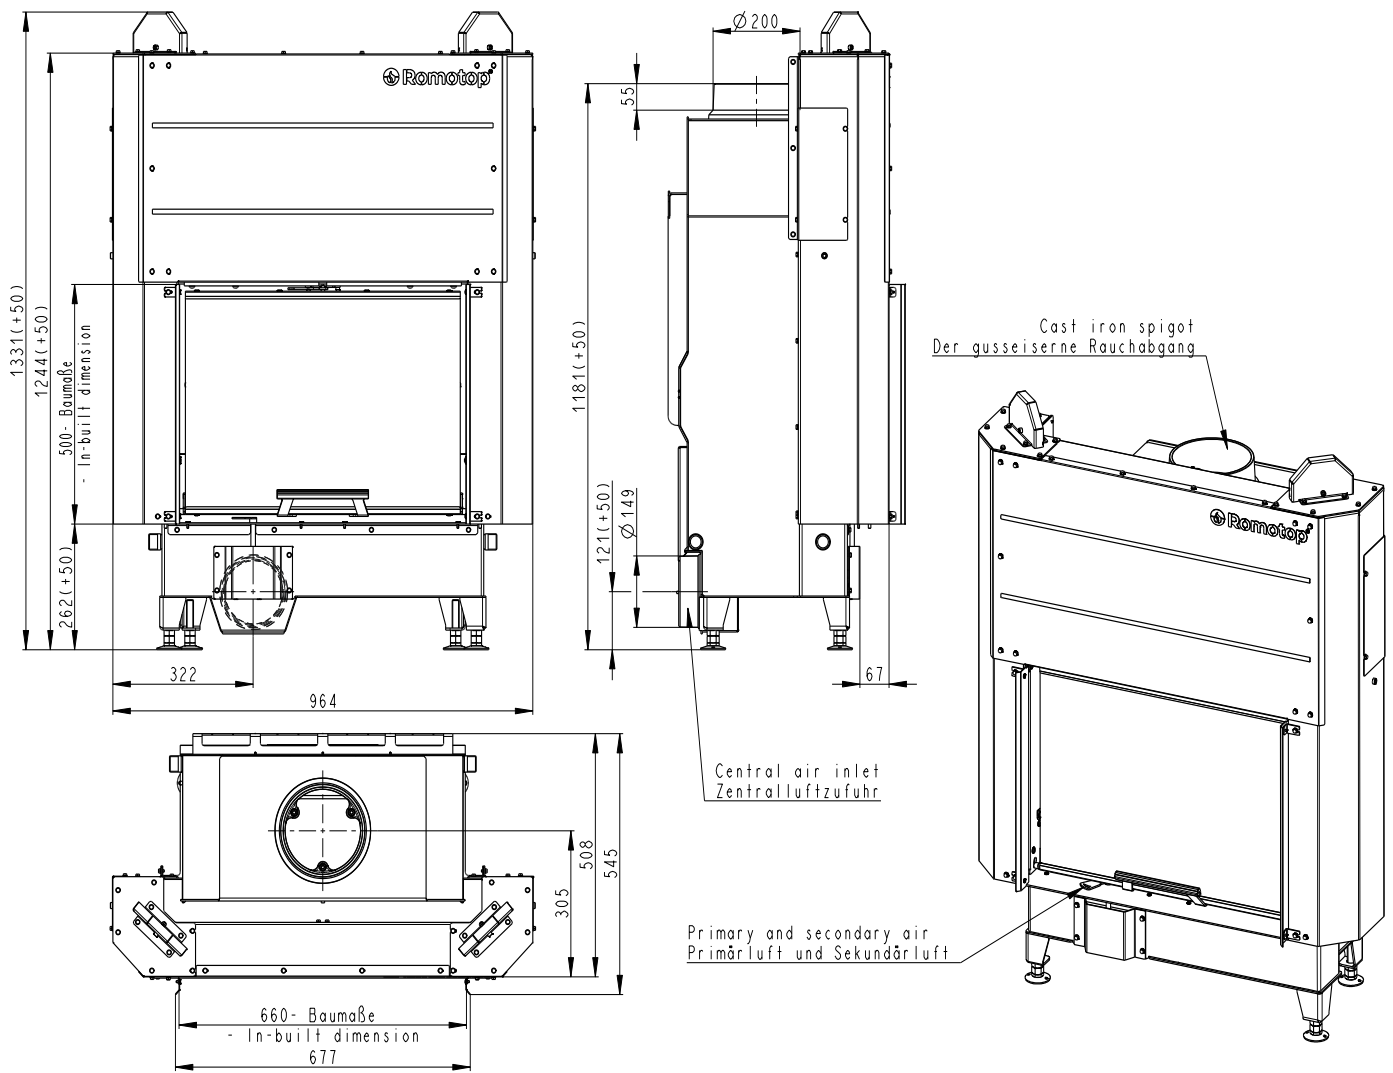

| | |
|--------|---------|
| Artikl | H2LE 01 |
|--------|---------|

General data

| | | |
|------------------------------------|------|-------|
| Nominal heat output | kW | 7,8 |
| Efficiency | % | 85 |
| Mass of the test fuel fired hourly | kg/h | 2,23 |
| Dry flue gases mass flow | g/s | 4,8 |
| Mean flue gas temperature | °C | 288 |
| Flue draught | Pa | 10 |
| Weight | kg | 230 |
| CO ₂ | % | 13,09 |

Recommended values

| | | |
|---|-------------------|-----------|
| Reg.output | kW | 4 - 10 |
| Max. mass of the test fuel fired hourly | kg/h | 4 |
| Min. cross section of convect air inlet for nominal output | cm ² | 880 |
| Min. cross section of convect air outlet for nominal output | cm ² | 1120 |
| Combustion air requirement | m ³ /h | 14,3 |
| Flue gas connector diameter | mm | 150 - 200 |

Meets requirement limit values for

| | |
|------------|---|
| EN 13 229 | • |
| BImSch V 1 | • |
| BImSch V 2 | • |
| DIN plus | • |
| 15a B-VG | • |

Supplied accessories

| | |
|--------------------------|---|
| Holder with magnet | • |
| Hook to open the ashtray | • |
| Ashtray | • |